



**ROCKMORE**  
INTERNATIONAL  
Rock Drilling Tools



TD40 Bit Shank  
Heavy Duty Wear Sleeve

**DTH HAMMER**

# ROK 400 HD - TD40

**Recommended Bit Diameter**  
127 - 140mm [5.0" - 5.5"]



## Features:

- High Performance Design
- Integrated SonicFlow Technology
- Patented Innovations
- Superior Penetration Rates
- Reduced Number of Components
- Easy Assembly / Maintenance
- Advanced Materials / Heat-Treatment
- Extended Service Life


## Applications:

- Mining / Blast Hole
- Environmental
- Geothermal
- Construction / Quarry
- Exploration

**SonicFlow Technology** greatly improves the air flow characteristics within the ROK hammer and ensures that the high pressure air paths are optimized to deliver greater energy to the piston. This is achieved by incorporating scientific air flow concepts in the design of the hammer and its various components such as the Top Sub, Piston, and Wear Sleeve. This technology results in more impact energy to the bit and produces higher penetration rates and better overall hammer performance.



## Innovative Design Features

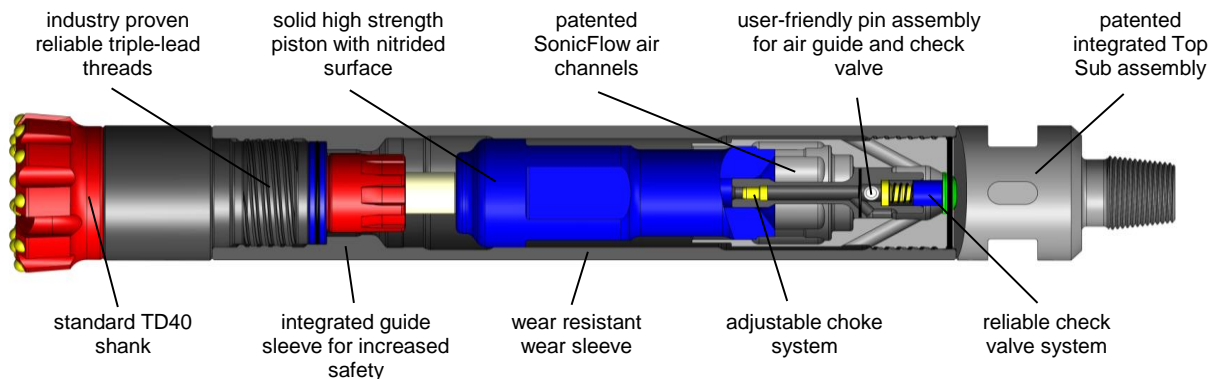

ROCKMORE International, Inc. 10065 S.W. Commerce Circle; Wilsonville, OR 97070, USA

ROCKMORE International GmbH Collini - Strasse 2; A-8750 Judenburg - Austria  
Tel: +43 3572 86 300-0; Fax: +43 3572 84 179; austria@rockmore-intl.at

www.rockmore-intl.com

Rev. 6-12-24




**ROCK MORE**  
INTERNATIONAL  
Rock Drilling Tools



**Integrated SonicFlow  
Technology**

## ROK 400 HD - TD40

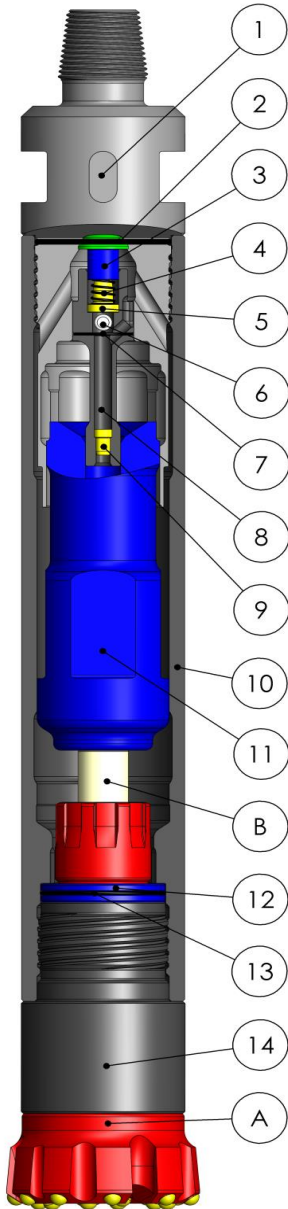

Patented

### Parts List

Item	Part Number	Description
1	ROK400-026 400TS-004	DTH Hammer, 400, TD40, 2-3/8" API IF Pin, HD Wear Sleeve Top Sub, 2-3/8" API IF Pin - <i>includes o-ring</i>
1	ROK400-030 400TS-001	DTH Hammer, 400, TD40, 2-3/8" API Reg Pin, HD Wear Sleeve Top Sub, 2-3/8" API Reg Pin - <i>includes o-ring</i>
2	R2-234	O-Ring, 2.984" X 0.139"
3	CV-001	Check Valve
4	SP-001	Spring
5	SR-002	Spring Rest
6	PN-002	Pin, 0.625" Dia, 3.0" L
7	R2-135	O-Ring, 1.925" X 0.103"
8	AG-002	Air Guide - <i>includes o-ring and choke</i>
9	CH-005	Blank Choke, Nylon
10	400WS-091	Wear Sleeve, Heavy Duty
11	PT-021	Piston
B	BTTD40-1022	TD40 Blow Tube
12	R2-229	O-Ring, 2.359" X 0.139"
13	BR-012	Bit Retainer Ring - <i>includes o-ring</i>
14	400DS-021	Driver Sub
A	DTH Bit	TD40 Shank
	CHSET-002	Choke Set, Nylon, 1 each of CH-005 - 0" (0mm), CH-006 - 1/16" (2mm), CH-007 - 1/8" (3mm), CH-008 - 3/16" (5mm)

### Operating Parameters

Air Pressure	Air Consumption
10.4 Bar [150 PSI]	5.8 m <sup>3</sup> /min [210 SCFM]
17.2 Bar [250 PSI]	10.4 m <sup>3</sup> /min [378 SCFM]
24.1 Bar [350 PSI]	15.3 m <sup>3</sup> /min [556 SCFM]
Oil consumption:	0.2 l/hr per 3.0 m <sup>3</sup> /min [1/3 pint/hr per 100 cfm]
Recommended rotation speed:	25 r/min to 80 r/min
Minimum diameter difference between wear sleeve and bit:	10 mm [0.39"]

### Technical Specifications

Bit shank type	TD40
Recommended bit diameter, mm [in]	127 to 140 [5.0 to 5.5]
Outside diameter, mm [in]	115 [4.5]
Wear sleeve discard diameter, mm [in]	89 [3.5]
Wrench flat size on Top Sub, mm [in]	64 [2.5]
Effective Length without drill bit, mm [in]	823 [32.4]
Weight without drill bit, kg [lbs]	48.5 [107.0]

ROCKMORE International, Inc. 10065 S.W. Commerce Circle; Wilsonville, OR 97070, USA  
Tel: +1-503-682-1001; Fax: +1-503-682-1002; info@rockmore-intl.com

ROCKMORE International GmbH Collini - Strasse 2; A-8750 Judenburg - Austria  
Tel: +43 3572 86 300-0; Fax: +43 3572 84 179; austria@rockmore-intl.at

www.rockmore-intl.com

Rev. 6-12-24