




Contents

Inhaltsverzeichnis / Sommaire / Indice

Page

Seite / Page / Página

6°	91
12°	92-93
Reaming Bits	94

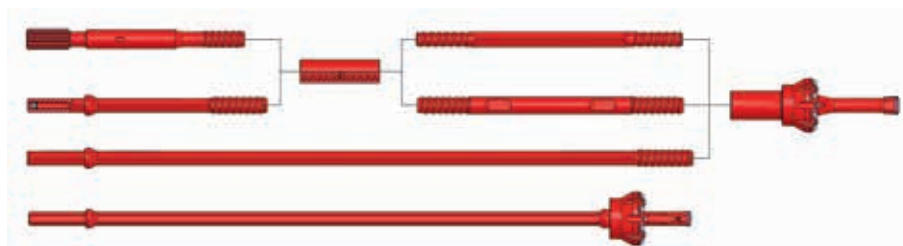

6°
Taper / Konus
Cône / Cono

Reaming bit Erweiterungsbohrkrone Taillant aléseur Broca ensanchadora	Carbide dimension Hartmetallabmessung Dimension métal dur Dimension metal duro				D				Part No. Artikel Nr. N° de réf. Cat. N°
	Gauge / Umfang diamètre / diámetro		Front / Stirnseite front / frente						
	[No.]	[mm]	[No.]	[mm]	[mm]	[in]			
	8	9.5	4	8	64	2 1/2"			A43030
	6	11	3	11	76	3"			A43031
	8	12.7	4	11	89	3 1/2"			A43014

Pilot adapter Führungsstück Adaptateur pilote Adaptador piloto	Thread / Gewinde Filet / Rosca	L		D		Flushing hole Spüllöcher Front / Side		Part No. Artikel Nr. N° de réf. Cat. N°	
		[mm]	[in]	[mm]	[in]				
		R25	300	11 13/16"	28	1 3/32"	1	1	A43089
		R28	300	11 13/16"	28	1 3/32"	1	1	A43085
	R32	300	11 13/16"	28	1 3/32"	1	1	A43083	

	Thread Gewinde Filet Rosca	Carbide dimension Hartmetallabmessung Dimension métal dur Dimension metal duro				L		D		Flushing hole Spüllöcher trou d'injection Agujeros de Lavado Front / Side		Part No. Artikel Nr. N° de réf. Cat. N°
		Gauge / Umfang diamètre / diámetro		Front / Stirnseite front / frente		[mm]	[in]	[mm]	[in]			
		[No.]	[mm]	[No.]	[mm]							
R25	4	7	0	0	267	10 1/2"	26	1 1/32"	0	2	A43070	
R28	4	7	0	0	267	10 1/2"	26	1 1/32"	0	2	A43071	
R32	4	7	0	0	267	10 1/2"	26	1 1/32"	0	2	A43072	

Pilot rod Pilotstange Allonge pilote Barra piloto	L		D		Part No. Artikel Nr. N° de réf. Cat. N°
	[mm]	[ft in]	[mm]	[in]	
Shank H 22 x 108 mm (7/8" x 4 1/4") Einsteckende / Emmanchement / Culata 	400	1' 4"	27	1 1/16"	A47287
	800	2' 7"	27	1 1/16"	A47205
	1200	3' 11"	27	1 1/16"	A43703
	1600	5' 3"	27	1 1/16"	A47105
	1800	5' 11"	27	1 1/16"	A47225
	2000	6' 7"	27	1 1/16"	A47169
	2400	7' 10"	27	1 1/16"	A47116
	3000	9' 10"	27	1 1/16"	A47227
	3300	10' 10"	27	1 1/16"	A47106

Reaming tools

Erweiterungsbohrersrüstung / Equipement pour alésage / Varillaje de ensanchadoras

12°
Taper / Konus
Cône / Cono



Reaming bit Erweiterungsbohrkrone Taillant aléseur Broca ensanchadora	Carbide dimension Hartmetallabmessung Dimension métal dur Dimension metal duro				D				Part No. Artikel Nr. N° de réf. Cat. N°
	Gauge / Umfang diamètre / diámetro		Front / Stirnseite front / frente						
	[No.]	[mm]	[No.]	[mm]	[mm]	[in]			
	8	9.5	4	8	76	3"			A43010
	8	12.7	4	9.5	89	3 1/2"			A43011
	8	12.7	4	12.7	102	4"			A43012
	8	14	4	14	115	4 1/2"			A43017
	8	14	8	12.7	127	5"			A43013


Pilot adapter Führungsstück Adaptateur pilote Adaptador piloto	Thread Gewinde Filet Rosca	L		D		Flushing hole Spüllöcher trou d'injection Agujeros de Lavado		Part No. Artikel Nr. N° de réf. Cat. N°
						Front / Side		
		[mm]	[in]	[mm]	[in]			
	R32	255	10 1/32"	40	1 9/16"	1	1	A43082
	R35	255	10 1/32"	40	1 9/16"	1	1	A43099
	T38	265	10 13/32"	40	1 9/16"	1	1	A43092
	R32 / R32	242	9 1/2"					A43084
	R35 / R35	242	9 1/2"					A43093
	T38 / R32	260	10 7/32"					A43097

	Thread Gewinde Filet Rosca	Carbide dimension Hartmetallabmessung Dimension métal dur Dimension metal duro				L		D		Flushing hole Spüllöcher trou d'injection Agujeros de Lavado		Part No. Artikel Nr. N° de réf. Cat. N°
		Gauge / Umfang diamètre / diámetro		Front / Stirnseite front / frente		[mm]	[in]	[mm]	[in]	Front / Side		
		[No.]	[mm]	[No.]	[mm]							
	R32	4	9.5	2	8	240	9 7/16"	41	1 5/8"	1	1	A43073
	T38	4	9.5	2	8	240	9 7/16"	41	1 5/8"	1	1	A43074

Bit Bohrkrone Taillant Broca	Thread Gewinde Filet Rosca	Part No. Artikel Nr. N° de réf. Cat. N°
	R32	See page / Siehe Seiten voir page / ver página 29, 30, 31, 79, 80, 84
	R35	

12°


Taper / Konus
Cône / Cono

(Locking thread T12)	Carbide dimension Hartmetallabmessung Dimension métal dur Dimension metal duro				D		Flushing hole Spüllöcher trou d'injection Agujeros de Lavado		Part No. Artikel Nr. N° de réf. Cat. N°
	Gauge / Umfang diamètre / diámetro		Front / Stirnseite front / frente				Front / Side		
	[No.]	[mm]	[No.]	[mm]	[mm]	[in]			
	8	12.7	4	11	102	4"	4	0	A43000
	8	12.7	4	11	115	4 1/2"	4	0	A43002
	8	12.7	4	11	127	5"	4	0	A43001

(Locking thread T12)	Thread / Gewinde Filet / Rosca	L		D				Part No. Artikel Nr. N° de réf. Cat. N°
		[mm]	[in]	[mm]	[in]			
	R32	304	12"	47	1 7/8"			A43075
	R38	304	12"	47	1 7/8"			A43076
	T38	304	12"	47	1 7/8"			A43078
	T45	304	12"	47	1 7/8"			A43079


Reaming tools

Erweiterungsbohrhausrüstung / Equipement pour alésage / Varillaje de ensanchadoras

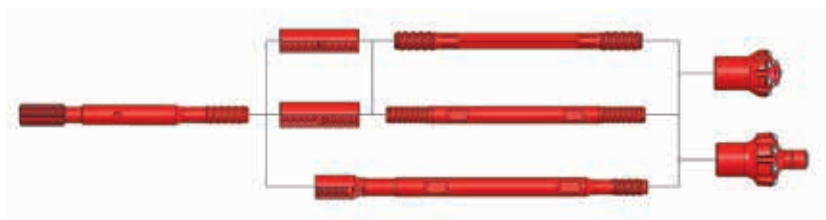

Reaming Bits

Erweiterungsbohrkrone
Taillant aléseur / Broca ensanchadora

Reaming bit Erweiterungsbohrkrone Taillant aléseur Broca ensanchadora	Thread Gewinde Filet Rosca	Carbide dimension Hartmetallabmessung Dimension métal dur Dimension metal duro				D		d		Flushing hole Spüllöcher trou d'injection Agujeros de Lavado		Part No. Artikel Nr. N° de réf. Cat. N°
		Gauge / Umfang diamètre / diámetro		Front / Stirnseite front / frente		[mm]	[in]	[mm]	[in]	Front / Side		
		[No.]	[mm]	[No.]	[mm]							
 	R32	8	14	4 / 3	11 / 11	102	4"	41	1 5/8"	2	0	A43067
	T38	8	14	7 / 4 / 2	11 / 11 / 9.5	102	4"	51	2"	2	0	A43043
	T38	8	14	4 / 6	12.7 / 12.7	127	5"	67	2 5/8"	2	0	A43044
	T45	8	14	4 / 6	12.7 / 12.7	127	5"	64	2 1/2"	2	0	A43059
	T45	8	14	4 / 6	12.7 / 12.7	127	5"	73	2 7/8"	2	0	A43045
	T38	8	16	6 / 6	14 / 14	152	6"	102	4"	2	0	A43046
	T45	8	16	6 / 4 / 2	14 / 16 / 12.7	152	6"	64	2 1/2"	2	0	A43060
	ST58	8	16	4 / 6	14 / 16	152	6"	89	3 1/2"	2	0	A43047
	R38	10	16	6 / 4 / 2	14 / 14 / 12.7	178	7"	76	3"	2	0	A43048
	T38	10	16	8 / 16	16 / 14	203	8"	152	6"	2	0	A43049
 	ST58	12	14	20 / 4	14 / 14	225	8 7/8"	127	5"	4	0	A43061
	R32	8	11	7	9.5	76	3"	29	1 5/32"	3	1	A43040
	R32	8	12.7	6 / 1	11 / 9.5	89	3 1/2"	29	1 5/32"	3	2	A43041
	R32	8	12.7	6 / 1	12.7 / 9.5	102	4"	29	1 5/32"	3	2	A43042
	R35	8	12.7	6 / 1	12.7 / 9.5	102	4"	29	1 5/32"	3	2	A43052
	T38	8	12.7	6 / 1	12.7 / 9.5	102	4"	29	1 5/32"	3	2	A43064
	R32	8	14	10 / 1	12.7 / 11	115	4 1/2"	29	1 5/32"	4	1	A43050
	T38	8	14	10 / 1	12.7 / 11	115	4 1/2"	29	1 5/32"	4	1	A43065
	R32	8	14	10 / 1	12.7 / 11	127	5"	29	1 5/32"	4	1	A43051
	T38	8	14	10 / 1	12.7 / 11	127	5"	29	1 5/32"	4	1	A43066

REAMING TOOLS

Note: other sizes available upon request